



PERFORMAX®
LUBRICANTS

ELEVATION PERFORMANCE





PERFORMAX®
LUBRICANTS



Petrol Engine Oil

Fully Synthetic and Semi-Synthetic Motor Oils are specifically formulated for use in all Gasoline Engines and are also suitable for EGR diesel engines. They deliver optimum protection for engines requiring multi-grade oil. A superior base oil provides exceptional performance across a wide operating range, from superior cold-temperature flow to outstanding high-temperature stability. Its stable Total Base Number (TBN) effectively neutralizes damaging acids produced during the combustion process, ensuring long-lasting acid depletion resistance.

SAE GRADES

0W-20 / 0W-30 / 0W-40 / 5W-20 / 5W-30 / 5W-40 / 10W-30 / 10W-40

Performance Level

API SN Plus / SN / SM / CF, MAN 3275, Mack EO M, Cummins 20078, VW 504 00 507 00

Benefits and Advantages

- Exceptional detergency and anti-wear properties
- Effective control of soot, sludge and piston deposits.
- Exceptional performances due to the lubricant's synthetic base oil added to high performance additives.
- Extended drain capability.

Application


This product is suitable for use in automotive gasoline engine where the manufacturer recommends API SN or earlier specification lubricant.

Packing available

1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PERFORMAX®
LUBRICANTS

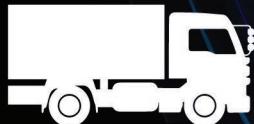

Diesel Engine Oil



Diesel Engine Lubricant uses a formula of premium base oils and advanced additive technology to meet the rigorous low-emission and high-performance requirements set by US, European, and Japanese engine makers. It also provides robust protection against oil thickening, high-temperature sludge, degradation, and corrosion, while ensuring exceptional shear stability.

SAE GRADES

10W-40 / 15W-40 / 15W-50 / 20W-50

Specification

ACEA E9, E7, MAN M3575, MB 228.31, MTU Type 2.1, Volvo VDS-4, Mack EO-O Premium Plus, Renault RLD-3, Cummins CES 20081, Caterpillar ECF-2, ECF-3
Deutz DQC III-10 LA, DDC 93K218, Global DHD-1, JASO DH-2

Benefits and Advantages

- Advanced additive technology for superior wear protection and longer oil life.
- Improved engine cleanliness and powerful protection against piston deposits.
- Excellent performance in heavy-duty operation.
- Superior oxidation resistance, soot control, and thermal stability.
- Facilitates easy cold starting and supports longer drain intervals.

Application

Diesel engine oil is recommended for use in both on-highway and off-highway diesel engines, including two-cycle and four-cycle engines. It helps extend the time between overhauls in high-speed, high-load, and pick-up/delivery operations.

Packing available


1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PERFORMAX®
LUBRICANTS



ATF Automatic Transmission Fluid

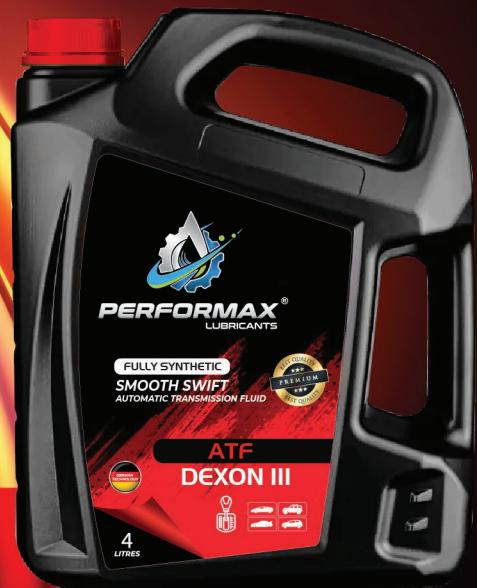

This premium, fully synthetic automatic transmission fluid is primarily formulated to meet GM's Dexron VI specification. Performax ATF delivers many advantages over conventional fluids, such as superior shear stability, exceptional wear protection, and significantly extended fluid life.

SAE GRADES

DEX II / DEX III / DEX VI / MV / CVT / WS

Specification

General Motors DEXRON® III H fluid / DEXRON® II

Ford MERCON® fluid

Allison C-4

Benefits and Advantages

- Extended fluid life
- Fuel economy benefits
- Improved low-temperature performance
- Backwards compatible to previous GM Dexron specifications
- Improved frictional properties
- Outstanding wear protection
- High film strength
- Low foaming

Application

This fluid may be used for automatic transmissions of different car manufacturers.

Packing Available

1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PERFORMAX®
LUBRICANTS



Gear Oil GL-4 / GL 5



Performax Gear Oil is a fully synthetic formula built with very high-quality base stocks, advanced extreme pressure (EP) and anti-wear additives, and premium shear-stable viscosity modifiers. It delivers unsurpassed load-carrying capacity critical for surviving shock loads, high torque, and high-speed operation and maintains its performance with excellent thermal stability.

SAE GRADES

80W90 / 85W140 / 90 / 140

Specification

API GL-5, SAE 80W-90, U.S. Military MIL-L-2105D, Mack GO-G

Benefits and Advantages

- Excellent low-temperature fluidity
- Maximum component protection
- High levels of oxidation resistance
- Outstanding thermal stability
- Robust semi-synthetic formulation

Application

Gear Oil is recommended for key transmission components including highly stressed manual gearboxes, heavily loaded axle drives, and transfer boxes across passenger cars, commercial fleets, and off-highway equipment.

Packing Available

1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PERFORMAX®
LUBRICANTS



4 Stroke Motorcycle Engine Oil



4-Stroke motorcycle engine oil specially designed to provide superior protection and consistent performance even under extreme conditions. These oils are specifically formulated to handle high-temperature operating conditions, ensuring optimum performance even in tough city driving. They deliver outstanding oxidation and wear protection for extended engine life and minimize deposits due to excellent sludge and varnish control. Furthermore, the advanced anti-wear additive system significantly reduces wear on highly stressed engine and gearbox components.

SAE GRADES

10W-30 / 10W-40 / 15W-50 / 20W-40 / 20W-50

Specification

API SN,SM,SL, JASO MA,JASO MA2, JASO 4T Clutch performance

Benefits and Advantages

- Ideal for low emission engines and high-performance vehicles.
- Provides superior protection against engine wear and excellent performance at low temperatures.
- Special cleaning agents and dispersants actively help prevent deposit formation.
- Designed to provide maximum protection for vehicles from all major manufacturers.
- Offers incredible protection against deposits and pre-ignition.

Application

Recommended for use in all 4-stroke motorcycle.

Packing Available

1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



Industrial Oils



HYDRAULIC OIL

Hydraulic Oil ISO 32 is a high performance anti-wear hydraulic oil specifically formulated from selected base oils and a proprietary additive system to provide well balanced performance in a range of applications. Manufactured from a high quality of virgin base oils combined with anti-wear additives and rust inhibitors, to provide high stable premium hydraulic fluids with quality reserve for excellent performance under severe operating condition in mobile industrial service. Designed to provide easy and long-life performance. This product has inhibitors of corrosion and water displacement and it ensures the protection of the hydraulic systems.



SOLUBLE CUTTING OIL

Soluble Cutting Oil fluid is specifically formulated from premium quality base oils and superior additives. It is suitable for lubricating and cooling a wide range of metal cutting and finishing operations. It's used on machines working with low-to-medium tensile ferrous metals and non-ferrous metals, such as aluminum and its alloys. The fluid possesses a high ability to assist the cutting tools within the machinery. It also readily disperses in water to produce a stable emulsion, counteracting water's natural acidity.

CIRCULATING OIL

Circulating oil is a premium quality mineral oil blended with carefully selected additives for use in circulation systems and certain other industrial applications which do not require oils with EP properties.

Packing Available

20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



PERFORMAX[®]
LUBRICANTS

ELEVATION
PERFORMANCE

PRODUCT OF
BGT LUBRICANTS TRADING

